


Energy market scenarios for evaluation of energy investments in industry

For the Pathways project
Version 2

September 2009

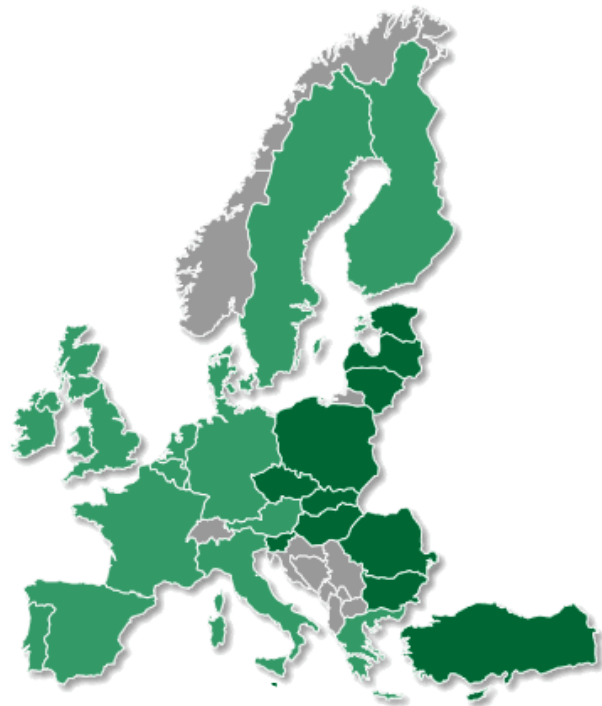

1/2009

INTERNAL REPORT

Energy market scenarios for evaluation of energy investments in industry

E. Axelsson¹, S. Harvey²

¹ Projektinriktad Forskning och Utveckling AB
Götaforsliden 13, nedre
431 34 Mölndal, Sweden
+46 (031)-720 83 78

² Chalmers University of Technology
Department of Energy and Environment / Heat and Power Technology
412 96 Göteborg, Sweden
+46 (0)31-772 85 31

**Internal report 1/2009
For the Pathways project**

Version 2

Foreword

The industrial sector can be a major contributor to increased energy efficiency and reduced CO₂ emissions provided that appropriate investments are made. Profitability and net CO₂ emissions reduction potential of such investments must be assessed by quantifying their implications within a future energy market context. Energy market scenarios including future energy prices can be used to reflect different possible future energy market conditions. By assessing profitability for different energy market conditions, robust investment options can be identified.

The scenarios presented in this report have been developed over a long period of time. Their development was initiated by Anders Ådahl in year 2000 as a part of his PhD project which aimed at developing methodology for evaluating economics and climate mitigation impacts of industrial energy projects in a climate conscious economy. In the thesis, a methodology developed during his project is presented, which includes blocks with different coherent market energy prices. The blocks were intended to be used to construct scenarios for evaluation of industrial energy projects. Erik Axelsson continued to develop the energy market scenarios in year 2006 in his PhD project by constructing a tool with which one can create consistent energy market scenarios. With the tool, Axelsson created four energy market scenarios for around year 2020, which were used to evaluate energy projects in the pulping industry. This would, however, not be the last version of the scenarios. With the involvement in the Pathways project (Pathways to Sustainable European Energy Systems) the Industrial Group was in need for scenarios stretching over a longer time period: from 2010 to 2050. Hence, the scenarios presented here were developed. The main funding for the results presented in this report was provided by the Pathways project. Additional funding was provided by the Swedish Energy Agency's Process Integration research programme.

During the whole process, from Ådahl's initial work with energy market parameter blocks to the current scenarios, improvements and updates have been done continuously to make the scenarios more consistent and usable. Simon Harvey has been along all the way, first as the supervisor of Ådahl, then as the co-author of Axelsson's work with scenarios, and has thus provide the continuity necessary to ensure that previous mistakes have hopefully not been repeated. Many users of previous versions of the scenarios have found that they have provided great help in finding robust energy projects. We hope that the energy market scenarios presented here can also be of use for you. We would also like to express our gratitude to a multitude of users of our scenarios. All your questions, comments and ideas have helped us to develop this new set of scenarios.



Erik Axelsson



Simon Harvey

SUMMARY

The industrial sector can be a major contributor to CO₂ emissions reduction, provided that appropriate investments are made. To assess profitability and net CO₂ emissions reduction potential of such investments, future energy market conditions must be taken into account. Energy market scenarios including possible future energy prices can be used to reflect different possible future energy market conditions. By assessing profitability for different energy market conditions, robust investment options can be identified.

To obtain reliable results from such an economic assessment, the energy market parameters within each scenario need to be consistent, i.e. different energy market parameters must be clearly related to each other (e.g. via key energy conversion technology characteristics and substitution principles). For constructing consistent scenarios, a calculation tool incorporating these interparameter relationships is essential. The tool presented in this report calculates energy prices for a large-volume customer based on forecasted world market fossil fuel prices and relevant policy instruments. Required user inputs to the tool include fossil fuel prices and charge for emitting CO₂ (other policy instruments can be included on an optional basis).

Based on these inputs, the marginal technology for electricity generation can be determined by setting the technology with lowest cost of electricity production as build margin. The resulting build margin determines the electricity wholesale price together with CO₂ emissions associated with marginal use of electricity. In the next step, the wood fuel market price is calculated based on the willingness to pay for a marginal wood fuel user. Finally, the heat production price is determined based on the identified price setting technology in a heat market. With this procedure, consistent future energy market prices can be determined. Moreover, CO₂ emissions related to marginal use of the energy streams can also be determined.

Using the tool, eight energy market scenarios covering a time period from 2010 to 2050 have been developed for the EU energy market. The eight scenarios are a result of combining two levels of fossil fuel prices and four level of CO₂ emissions charge. Two levels of fossil fuel prices represent different developments on the fossil fuel world market. Four levels of CO₂ emission charge were chosen so as to reflect a wide spectrum of political ambitions to decrease CO₂ emissions, ranging from weak to strong ambition levels.

The tool and the scenarios are developed for European conditions without taxes. Additional input may be required concerning taxes and policy instruments in order to reflect local conditions in specific markets.

The energy market scenarios presented in this report are intended to reflect different possible development paths for key energy market parameters that are internally consistent. The authors have done their utmost best to collect and analyse the best input data available for the calculations presented, and to identify low and high values for key parameters so that the scenarios presented can hopefully constitute cornerstones for possible future developments of energy markets. The energy market scenario tool is however not a modelling tool, and the resulting scenarios should not be taken as an attempt to forecast the future development of the European energy market.

TABLE OF CONTENT

1	INTRODUCTION.....	2
2	LIMITATIONS OF THE TOOL AND THE SCENARIOS.....	3
3	FUTURE ENERGY MARKET PRICE MECHANISMS.....	4
3.1	OVERVIEW.....	4
3.2	POLICY INSTRUMENTS.....	5
3.3	FOSSIL FUEL MARKET.....	5
3.4	ELECTRICITY MARKET.....	6
3.5	BIOENERGY MARKET.....	8
3.6	HEAT MARKET.....	12
4	EIGHT SCENARIOS FROM 2010 TO 2050.....	15
4.1	USER INPUTS TO THE TOOL.....	15
4.2	RESULTING ENERGY MARKET SCENARIOS.....	17
4.2.1	<i>Fossil fuel market.....</i>	<i>17</i>
4.2.2	<i>Electricity market.....</i>	<i>18</i>
4.2.3	<i>Wood fuel market.....</i>	<i>19</i>
4.2.4	<i>Heat market.....</i>	<i>20</i>
5	REFERENCES.....	21

Appendix A: Input data and resulting energy market parameters.

Appendix B: Suggestions for short descriptions of the scenarios.

NOMENCLATURE

Biofuel	Renewable transportation (motor vehicle) fuel based on biomass
CCS	Carbon Capture and Storage
DME	Dimethyl Ether (transportation fuel)
CHP	Combined Heat and Power
COE	Cost Of Electricity
NG	Natural Gas
EI	Electricity
FT-diesel	Fischer-Tropsch Diesel (transportation fuel)
GHG	Greenhouse gas
Inv	Investment cost
NGCC	Natural Gas Combined Cycle
O&M	Operating and Maintenance cost
RES-E	Electricity produced from renewable energy sources
RME	Rape seed methyl ester (transportation fuel)
WTP	Willingness To Pay
η	Thermodynamic efficiency, e.g. electrical efficiency of power plant with subscript "el".

1 INTRODUCTION

The European Union has committed to decrease its CO₂ emissions by 8 % by 2012 and by at least 20 % by 2020 (compared to 1990 levels). Major reductions can be made in the energy intensive industry if necessary investments are made [1, 2].

Such investments must be evaluated with respect to profitability for the industrial investor and net CO₂ emission consequences for the entire energy system. Many investments which reduce CO₂ emissions have a long lifetime and/or are not yet commercially available, thus it is important to assess the economic performance and CO₂ emission consequences of such measures over a long period of time.

A traditional way to handle uncertainty when assessing investments with a long lifetime is to perform sensitivity analysis where different energy market parameters are varied separately. Energy market parameters are, however, not independent of each other, rather strongly connected.

In order to account for consistent interrelations between energy market parameters, energy market scenarios can be used [3, 4]. Using scenarios it is easier to draw clearer conclusions regarding the performance of a given investment for different future energy market conditions. Hence, this approach is very helpful in the process of finding robust investment alternatives.

Generating energy market scenarios with consistent parameters is a time-consuming and complex task since energy conversion technologies and prices are connected to each other. In a previous paper by the authors, a tool for generating consistent energy market scenarios and four scenarios for around 2020 were presented [5]. At that point, the tool did not include a heat market model, and the scenarios presented were only for one point in time. In this report the tool is expanded to include a heat market and also eight different possible energy market developments over a continuous time period from 2010 to 2050. Moreover, several updates concerning basic input data and improved modelling principles are implemented in this version of the tool.

The aim of this report is to present the expanded tool for creating energy market scenarios and present a spectrum of possible energy market developments for 2010-2050 for European conditions.

Section 2 discusses how the tool is intended to be used. The price mechanisms adopted in the tool are presented in Section 3. In Section 4 the use of the tool is illustrated by constructing eight energy market scenarios for 2010-2050. All the energy market parameters for the resulting scenarios are also presented in Appendix A. In Appendix B, suggestions for short texts describing on the scenario tool and resulting scenarios may be found. These descriptions can be included in written reports for investigations in which the scenarios are used.

2 LIMITATIONS OF THE TOOL AND THE SCENARIOS

It should be noted that the tool presented is not an energy market model featuring market equilibrium calculations based on demand elasticities and other advanced modelling features. Moreover, the resulting energy market scenarios should not be considered as forecasts of future energy market conditions. Rather, the different scenarios present different sets of consistent energy market parameters that constitute plausible cornerstones of the future energy market. With this restriction in mind, the tool includes only a limited number of possible technologies in the different sectors considered. It should also be stressed that the tool is built upon the assumption that prices in all energy market sectors considered in the tool are driven by rational production cost minimisation. It is also assumed that prices in the different sectors considered adapt immediately to climate targets, i.e. to the CO₂ emissions charge.

The tool and the scenarios are developed for European conditions without taxes. Additional input may be required concerning taxes and policy instruments in order to reflect local conditions in specific markets.

It should also be noted that the tool is built for creating energy market scenarios adapted for evaluating energy efficiency and CO₂ emissions reduction investments in industry. The tool can also be used for other sectors provided attention is paid to specific conditions for the sector considered. For instance, the energy prices in the domestic sector (small volume customers) are usually higher than for the large volume customers considered here.

When evaluating the impact on global warming of an industrial process, all GHG emissions should be included. In the European energy sector, however, CO₂ accounts for 98 % of total GHG emissions in CO₂ equivalents [6]. Therefore the considerations presented in this report are restricted to CO₂ emissions.

3 FUTURE ENERGY MARKET PRICE MECHANISMS

For the construction of the tool, different assumptions were made regarding future markets for fossil fuels, electricity, bio energy and heat. These assumptions are presented below. The manner in which policy instruments are handled in the tool is also presented, but first an overview of the tool and the calculation flow is given.

3.1 Overview

The calculation procedure adopted in the tool is illustrated in *Figure 1*. It is assumed that fossil fuel prices are set on the world commodity market. These prices must then be adjusted to obtain prices for end-users. Assumptions regarding policy instruments such as the charge for emitting CO₂ are set by the user. The adjusted fuel prices are then assumed to determine the market electricity price, which in turn influence price levels in the bio energy market and the heat market. CO₂ emissions associated with different energy streams are also calculated and are based on well-to-gate emissions data.

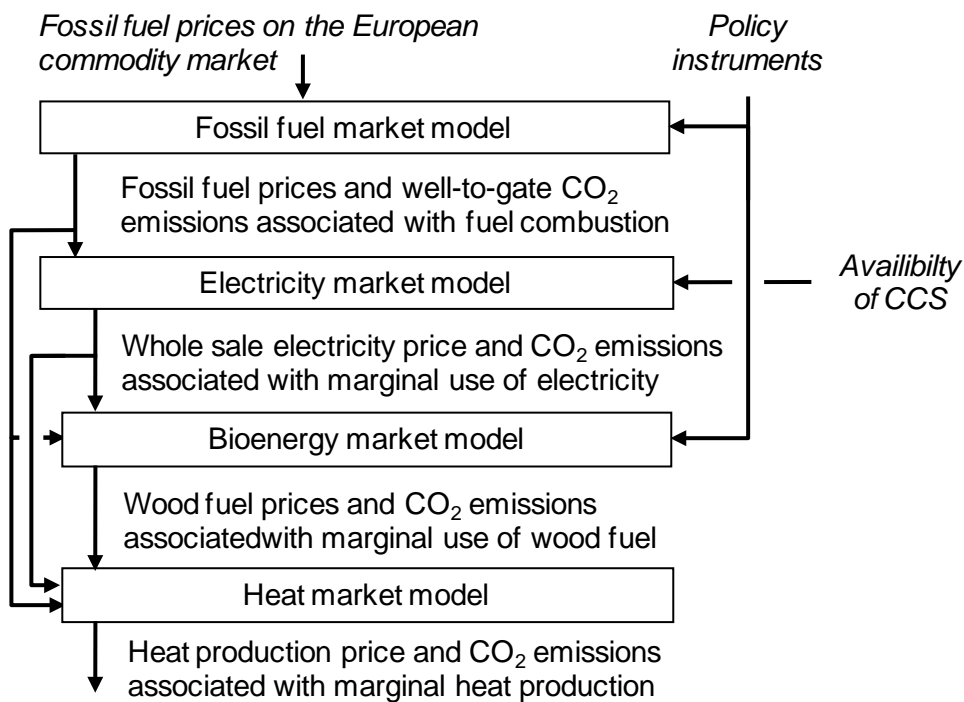


Figure 1: Overview of the calculation tool. Required input in italics. Boxes represent calculation units. Arrows represent information flow.

3.2 Policy instruments

Policy instruments play an important role in today's energy market, and can have a major influence on the energy prices and choice of energy conversion technology in different energy market segments. How policy instruments are treated in the tool is described below.

CO₂ emission charge

We assume that there is a charge associated with emissions of fossil CO₂. The form of charge for emitting CO₂ is not vital for the calculations; it can be a tax, purchase of a tradable emission permit, or similar. The important assumption is that the CO₂ charge is the same for all emitters. An additional important assumption is that there is no charge on CO₂ that is captured and stored. We thus assume that for CO₂ captured in the case of combustion of biomass, a revenue corresponding to the CO₂ charge is generated.

Support for use of biomass fuels

In many states within the European Union the use biomass instead of fossil fuel is supported. The type of support differs and can for example be lower energy taxation than for fossil fuel. Another type of support for biomass is through supporting electricity produced by using biomass as fuel, since this count as renewable electricity. Production of renewable electricity is promoted in many countries by green electricity certificates, feed-in tariffs, or other systems [7, 8]. This premium can have a significant impact on the revenue of electricity produced by wood fuel, which in turn can influence a user's willingness to pay for this fuel. Hence, this type of policy instrument is included in the tool so as to reflect wood fuel prices that are higher than those achieved by only assuming policy instruments related to CO₂ emissions.

Other policy instruments

Throughout Europe a number of additional and different policy instruments affect local energy market conditions. However, no other instruments than the two mentioned above are considered in the tool. The tool is prepared for inclusion of policy instruments specifically targeted at promoting production of renewable transportation fuel. Such policy instruments could be introduced in the near future in order to support the goal to reach 10 % renewable fuel in the transportation sector by 2020.

3.3 Fossil fuel market

Forecasts for world market fossil fuel prices can be found in different sources. However, these forecasts often regard non-refined products. To obtain the prices for end-users, costs for processing, transportation, CO₂ emissions charge etc must be added, as discussed below.

Fuel oil

There are mainly two different grades of oil fuels used in the stationary sector: light fuel oil (produced from gas oil) and heavy fuel oil (produced from fuel oil). Gas oil and fuel oil are cracking products of crude oil and the price relation between crude oil and the two oil products (light and heavy fuel oil) considered in this work is based on an analysis of oil product price statistics [9]; see *Equations 1 and 2*.

Eq 1:

$$\text{Price of light fuel oil} = 1.14 \cdot \text{crude oil price} + 11.6 \text{ (€/MWh)}$$

Eq 2:

$$\text{Price of heavy fuel oil} = 0.86 \cdot \text{crude oil price} + 1.94 \text{ (€/MWh)}$$

Natural gas and coal

For natural gas, the EU import price plus a transit and distribution cost of 4.3 €/MWh is used. For coal an average transportation cost from port to end-user of 0.9 €/MWh is assumed.

CO₂ emissions charge

Besides the costs presented above, a CO₂ emissions charge is also added to the fossil fuel prices. The charge is based on well-to-gate emissions of CO₂ [10]; see *Table 1*. The motivation to use well-to-gate emission is the assumption of a harmonized CO₂ charge in the future (see Section 3.2), where not only combustion emissions will affect the fuel price, but also emissions related to fuel production, refining and distribution. By using well-to-gate emissions, CO₂ emission costs throughout the fuel production chain will be included automatically.

Table 1: Well-to-gate CO₂ emissions for fossil fuels (kg/MWh).

Fuel oil		Coal	NG	Diesel	Gasoline
light	heavy				
295	295	347	217	277	285

3.4 Electricity market

The cost of electricity production (COE) is assumed to be the total generation cost (including investment cost) for a new base load plant (i.e. the “build margin” as discussed in Ref. [3]). This cost is then assumed to set the electricity price for energy intensive industrial customers. For this user group, no difference is made between purchase and sale prices. However, in addition to the energy price, there are often transmission and distribution charges. Since these vary considerable throughout Europe they should be added by users having a specific region or country in mind.

The main assumption concerning the electricity market is that base load build margin electricity production in the modelled time period will still occur in condensing power plants fired with fossil fuels [11]. *Table 2* lists possible build margin technologies considered in the tool (with data originating from Ref. [12]). As can be seen in *Figure 1*, it is up to the user to decide if carbon capture and storage (CCS) is commercially available for power plant applications.

Table 2: Base load build margin alternatives for electric power production.

Build margin ^a	Inv. €/kW _{el}	Fixed O&M €/MWh _{el}	Var O&M €/kW _{el}	η _{el} ^c
Coal power plant	1023	26.3	1.0	0.48-0.56
Ditto with CCS ^b	1614	39.7	1.1	0.37-0.43
NGCC	630	26.4	0.3	0.63-0.71
NGCC with CCS ^b	1080	32.4	0.4	0.47-0.53

^a Operating time: 7450 hrs/yr for all technologies.

^b The CO₂ capture degree is assumed to be 88 %.

^c Different electricity efficiencies (power output / fuel input) depending of year of commission.

COE is calculated according to *Equation 3* for all power plant technologies using data from *Table 2*.

$$\text{Eq 3: } COE = \frac{Inv \cdot a + C_{O\&M} + C_{fuel} + E_{CO_2} \cdot C_{CO_2}}{El_{Prod}}$$

where:

COE = Cost for electricity production (€/MWh), calculated as annual average.

Inv = Investment cost for the power plant (€)

a = annuity factor (yr⁻¹), 0.087 is used (corresponding to 20 years and 6 % discount rate).

C_{O&M} = Operating and maintenance costs (€/yr)

C_{fuel} = Cost for fuel (€/yr)

E_{CO2} = CO₂ emissions (tonne/yr)

C_{CO2} = CO₂ emissions charge (€/tonne)

El_{prod} = Annual electricity production (MWh/yr)

The technology that achieves the lowest COE with given inputs is assumed to constitute the base load build margin in that situation (scenario and year).

Changes in electricity consumption or production at an industrial site are assumed to correspond to changes in base load build margin production. Hence, with known build margin technology, the CO₂ consequences of marginal electricity usage or generation can be calculated for an industrial plant site.

For a number of reasons there is currently a nuclear revival trend in a number of European countries. In the energy market scenarios presented in this report nuclear power was not included as an optional build margin technology. The tool, however, is prepared for including nuclear power as a base load build margin.

3.5 Bioenergy market

Bioenergy can be any renewable energy fuel feedstock that is derived from biological sources. However, here the view of the bioenergy market is limited to low and high grade wood fuels (for instance forestry logging residues and pellets, respectively).

For fossil fuels there is a world market, for electricity there is a European market but for wood fuel there is no established market covering a larger geographical area than a country [13]. Rather, there are many local markets and furthermore wood fuel prices can vary significantly between different countries, e.g. due to different national policy instruments. Even within a country, wood fuel prices may vary significantly as a result of regional differences in demand and supply combined with the fact that wood fuels cannot be transported over large distances at a reasonable cost.

However, with increasing requirements on the share of renewable energy according to the European renewable energy targets, it is likely that a European bioenergy market will develop, leading to a gradual harmonization of wood fuel price [13]. In this report a harmonized European bioenergy market is assumed.

Within a well-functioning bioenergy market the wood fuel price is determined by the intersection of the demand and supply curves. Establishing these curves for future conditions is, however, very difficult. Instead, we have identified two different possible high volume users of wood fuel that are potential marginal (price-setting) user categories.

One potential marginal wood fuel user category is coal power plants (e.g. with fluidized bed combustion technology), where wood fuel can be co-combusted in the boiler, thereby enabling fossil coal usage to be partly replaced by wood fuel at relatively low investment costs [14]. Already today a number of such plants fire wood fuel in their boilers, and with increasing CO₂ charge their willingness to pay for wood fuel increases. Since the wood fuel demand of these plants is potentially very large compared to the supply [15], they are likely to become the marginal (i.e. price-setting) wood fuel user under current policy conditions; see *Figure 2*.

In the EU's renewable energy policy targets, there is a target for the share of renewable energy use in the transportation sector of 10 % by 2020. To reach this target, dramatic increase in production of biofuel is needed within the EU unless the biofuel is imported. Hence, producers of biofuel could become a high volume user of wood fuel and thus constitute the marginal (price-setting) wood fuel user category; see *Figure 2*. This case is considered in the tool, based on production of the transportation fuel DME (Dimethyl Ether). Conversion and cost data presented by Boding et al. [16] were used for this case; see *Table 3*. There are other biofuel options besides DME, such as ethanol, FT-diesel, RME, but here production of biofuel is illustrated by DME production.

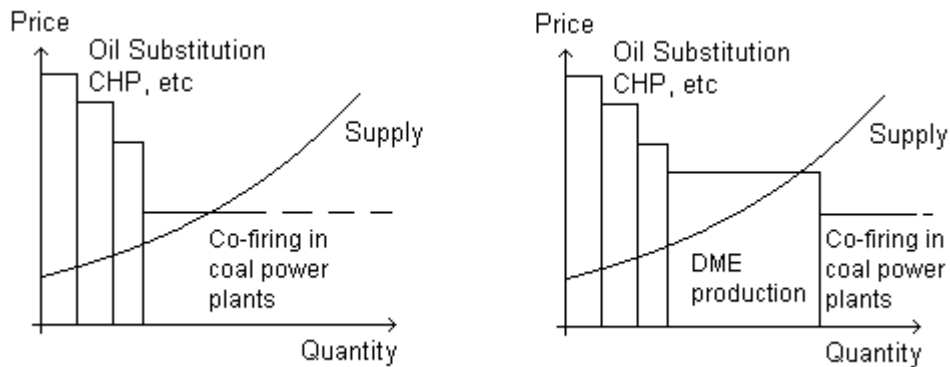


Figure 2: Supply and demand curves for wood fuel based on hypothetical marginal (price-setting) wood fuel user categories. Left: Co-firing in coal power plants. Right: DME production.

There are also additional wood fuel user categories included in the tool, e.g. boiler fuel (oil) substitution and investment in new industrial Combined Heat and Power (CHP). These user categories often have higher Willingness To Pay (WTP) for wood fuel than coal power plants and DME producers; see *Figure 2*. These user categories, however, are assumed to have limited demand and are not considered as realistic marginal (i.e. price-setting) wood fuel users. Consequently, only two potential marginal user categories are considered in the tool: coal power plants with wood fuel co-firing and DME production plants.

WTP for wood fuel for co-firing in coal power plants is assumed to be equal to the market coal price (including CO₂ emissions charge) reduced by 2.9 €/MWh; see *Equation 4*. The 2.9 €/MWh reduction accounts for the additional costs at the power plant related to use of wood fuel instead of coal. According to Ref. [17] the total difference in willingness to pay between coal and biomass is 7.2 €/MWh, including increased transportation costs. To determine the intrinsic market value of wood fuel, this figure is reduced by 4.3 €/MWh, which represent the average transportation cost from seller to end-user [18] (see further discussion below).

In the case of co-combustion of wood fuel in coal power plants, WTP for wood fuel can be higher if the plant benefits from economic policy instruments that support renewable electricity production (see Section 3.2). This additional option is presented by the term within brackets in *Equation 4*.

To calculate WTP for wood fuel for DME producers, the economic market value of DME at the gate of the production facility must first be determined. The gate price of DME can be related to the market price of the corresponding fossil transportation fuel including the CO₂ emission charge for this fuel; see *Equation 5*. As already stated in Section 3.2, a harmonized CO₂ emission charge is assumed. This implies that the transportation fuel has the same CO₂ emission charge as other fuels in the tool. Based on statistics provided in Ref. [9] the market price of fossil transportation fuel can be related to the crude oil price; see *Equation 6*. The crude oil price is an input data to the tool; see *Figure 1*. With plant data for DME production (see *Table 3*), the DME plant's WTP for wood fuel can be calculated according to *Equation 7*.

Table 3: DME production plant data [16].

DME output rate (MW)	131
Electricity input (MW)	12,5
Wood fuel input (MW)	200
Inv. €/kW _{DME}	1893
O&M (M€/yr)	10,7
Operating time (h/yr)	8000

Eq 4:

$$WTP_{Wood\ fuel, Coal} = Coal\ price + CO_2\ emissions\ charge - 2.9\ €/MWh\ (+support\ for\ RES-E \cdot \eta_{el})$$

Eq 5:

$$Market\ value\ of\ DME = Price\ of\ equivalent\ fossil\ transportation\ fuel + CO_2\ emissions\ charge\ for\ ditto$$

Eq 6:

$$Market\ Price\ of\ fossil\ transportation\ fuel = 1.2 * price\ of\ crude\ oil + 1.18\ €/MWh$$

Eq 7:

$$WTP_{Wood\ fuel, DME} = \frac{DME \cdot P_{DME} - Inv \cdot a - C_{O\&M} - El \cdot P_{el}}{Wood\ fuel}$$

where:

$WTP_{Wood\ fuel, Coal}$ = Coal power plant's willingness to pay for wood fuel (€/MWh)

$RES-E$ = Electricity produced from renewable energy sources

η_{el} = electrical efficiency of the coal power plant (see Table 2).

$WTP_{Wood\ fuel, DME}$ = WTP for wood fuel for DME production plants (€/MWh)

DME = DME production, annual average (MWh/yr)

P_{DME} = Price (market value) of DME (€/MWh)

Inv = Investment cost for the DME plant (€)

a = annuity factor (yr^{-1}), 0.087 is used (corresponding to 20 years and 6 % discount rate).

$C_{O\&M}$ = Operating and maintenance cost (€/yr)

El = Electricity used (MWh/yr)

P_{el} = Electricity price (€/MWh)

$Wood\ fuel$ = consumption of wood fuel (MWh/yr)

The wood fuel price achieved is considered to be the price for low grade wood fuel such as forest residues (e.g. tops and branches) or bark from a pulp mill. It is assumed that the low grade products set the market price for wood fuel and that the price of high grade fuels such as pellets can be determined based on average price ratios for the different qualities available in wood fuel market statistics data [19]. These statistical prices reflect prices for wood fuel delivered to the end user. To obtain the corresponding revenue for fuel producers, the buyer's price must be reduced with transportation costs which are assumed to be 4.3 €/MWh [18].

CO₂ emissions corresponding to marginal use of wood fuel are based on avoided emissions for the fossil fuel that is substituted. Avoided CO₂ emissions thus refer to situations where wood fuel is assumed to be a limited resource and additional wood fuel is made available on the market as a result of energy savings or similar measures made in processing plants with biomass as feedstock, and where biomass fuel streams are available as process by-products (this situation is especially relevant for the pulping industry, where excess bark from the

debarking operations or excess lignin not required to cover process energy requirements can be released in varying quantities according to the efficiency of the process).

The additional wood fuel is assumed to be used as marginal wood fuel as described above and will, hence, substitute coal or fossil transportation fuel. The well-to-gate emissions for wood fuel handling (10 kg/MWh) and DME production (24 kg/MWh) [10], respectively, have been deducted from the emissions of coal and diesel. In the case of DME production, the emissions related to marginal use of electricity have also been included. The same CO₂ emissions are assumed for all qualities of wood fuel. In reality, there might be site-specific differences, but these cannot be taken into consideration in a general tool such as this one.

With the method described above, three different prices and two different CO₂ emission levels related to wood fuel usage are obtained for each grade of wood fuel (DME production and co-combustion with or without RES-E support). All prices and associated CO₂-emissions are presented in parallel in the results (see Section 3.2.3 and Appendix A) and it is up to the user to select the one that best fits to the user's situation. However, to help the user, two different approaches for the selection are presented below:

Approach 1, highest price and related CO₂ emissions

One simple approach is to select the wood fuel user with the highest willingness to pay as the marginal user (with or without support for renewable electricity). Consequently, the CO₂ emissions of marginal wood fuel use can simply be related to the emissions of the marginal user.

Approach 2, highest price but transportation fuel production is always assumed for CO₂ emission calculations

With the Approach 1 above, wood fuel would not be used to produce transportation fuel if coal powered plants have a higher willingness to pay. This might appear a bit strange in the light of renewable requirements imposed upon the transportation sector which would require a considerable production increase of biofuel. Hence one can assume production of transportation fuel as the marginal user of wood fuel and that there are policy instruments supporting this. A well balanced policy instrument should promote biofuels without causing a major disruption of the biomass market. Hence, it can be assumed that the support is such that WTP for wood fuel is slightly higher for transportation fuel producers compared to coal power plants (co-firing), making transportation production the marginal user of wood fuel. Consequently, in this approach the highest price of wood fuel would still be used (with or without support for renewable electricity), but for CO₂ emissions production of transportation fuel production is assumed. If the levels for needed support are desired, this can easily be determined by using the tool.

These two approaches should cover most scenario usage situations. However, one can consider other combinations and even average values of the two approaches presented to reflect specific circumstances and regions. It is all up to the user of the tool.

3.6 Heat market

Heat for the purpose of heating buildings can be supplied through a district heating network. Heat cannot be transferred long distances with reasonable economy. Hence, the geographical stretch of the heat market is normally limited to about the size of a city. Consequently, one cannot say that there is a common heat market within a nation or region; instead there are many local markets. Between different markets, or district heating networks, the mix of heat production technologies may vary considerably. The reason for the difference in heat production technologies in different heat markets are differences in local conditions. The differences can regard cost and availability of different fuels (gas, biomass, waste etc) and availability of geothermal or industrial waste heat. Moreover, the heat demand over the year differs in different parts of Europe, and there can also be different legal aspects. All these aspects can considerably influence the heat production mix. The heat production mix has a major influence on the production price of the heat. Any new player on a local heat market (for instance industries wishing to sell their waste heat) must relate to the local heat price. Because of the differences in different district heating networks, the willingness to pay for a the heat supplied by a new market entrant varies considerably from network to network, according to Johnsson [20].

Despite such differences, it is nevertheless possible to make a number of generalisations regarding the value of heat in district heating systems. For instance, in a European aspect, the maximum price of heat can be determined by comparing with the price a potential customer has to pay for heat from a local gas boiler. No customer is willing to pay more for heat than this and a supplier of district heat must be able to offer a lower price in order to enter the heat market. To determine the maximum heat production price in this case, one has also to consider the distribution cost for district heating; see *Equation 8*. As can be seen, no investment cost is included for the local gas boiler. The reason for this is that a conversion from existing local gas heaters to an expanding district heating is assumed in the price relation.

Eq 8:

$$\text{Heat price}_{max} = P_{gas, local} / \eta_{lgb} - \text{distribution cost for district heating}$$

where:

Heat price_{max} = maximum heat price for delivering to a district heating network (€/MWh)

$P_{gas, local}$ = price for gas for a small customer (€/MWh)

η_{lgb} = thermal efficiency for the local gas boiler

The price of natural gas for small-scale consumers is on average 9 €/MWh higher than for large-scale customers [21]. The end user price of gas for a large customer is determined by the output from the fossil fuel market model; see Section 3.3. The distribution cost includes investment and maintenance cost as well as cost for heat and pressure losses for a district heating network [22]. This cost varies with the density of the customers, but is about 7 €/MWh for an average density network [22]. The thermal efficiency of a local gas boiler is set to 0.85. This figure represents the thermal efficiency of a central heater in a block of apartments which would be the typical case for expansion of district heating in an urban area.

By comparing with the heat production price for a local gas boiler, the maximum

willingness to pay for heat delivery to a district heating system can be identified. However, the production cost for district heat can be lower than this. Hence, new players on the heat market, such as industries with waste heat, cannot always assume this maximum price. To obtain the minimum price of heat, a technology with a low heat production cost can be considered. One such technology that is common in district heating systems in Europe is coal CHP [23]. The heat price in such a plant can be determined according to *Equation 9*. As can be seen in the equation, investments costs are not included. The reason is that new player on an existing heat market would probably have to compete with the running cost of an existing heat producer. Using the plant data in *Table 4*, the heat price can thus be determined.

Eq 9:

$$\text{Heat price}_{min} = P_{fuel} \cdot (1+\alpha) / \eta_{tot} - \alpha \cdot P_{el} + C_{O\&M}$$

Where:

*Heat price*_{min} = minimum heat price for delivering to a district heating network (€/MWh)

*P*_{fuel} = Fuel price including CO₂ charge (€/MWh)

α = electricity to heat ratio of the CHP unit

η_{tot} = total efficiency of the CHP plant

*P*_{el} = economic value of cogenerated electricity (€/MWh), i.e. the electricity price according to the electricity market model in the tool

*C*_{O&M} = Operating and maintenance cost (€/yr)

Table 4: Data for a coal CHP plant.

	α	η_{tot}	<i>C</i> _{O&M}
Coal CHP	0,55	0,88	4 €/MWh _{heat}

The intention with these minimum and maximum heat prices is to determine the span of heat prices that a new player on an existing heat market would have to compete with. A new player could typically be an industry wanting to sell their waste heat. Experience from the Swedish market shows that the price an industry is paid for their waste heat is often lower than the marginal production cost for established district heat suppliers [20]. Moreover, the load and annual time of heat deliveries vary significantly from case to case. These experiences should be taken into consideration when the figures presented here are used, i.e. it is important not to overestimate the value of waste heat from an industrial plant.

The willingness to pay for waste heat according to *Equation 8* and *9* does not include any investments for piping to a new player. It is however likely that new piping to the industrial site would be needed, but since this cost is very site specific it is not included in the willingness to pay values presented here. Instead the user of the tool has to take this cost into consideration separately.

With the method described above, the maximum and minimum values for the e.g. waste heat from an industrial supplier can be found. Waste heat of this kind can be considered CO₂ neutral since no additional fuel is used for the production of this by-product. Hence, deliveries of waste heat would decrease the CO₂ emissions in the heat system if the heat production is otherwise associated with CO₂ emissions. The CO₂ emissions associated to the replacement of a local gas boiler (maximum heat price in *Equation 8*) can be related to the use of gas. In the case of replacement of coal CHP (minimum heat price in *Equation 9*), the CO₂ emissions are of

course related to the use of coal, but in this case the CO₂ emissions of the marginal electricity production must also be considered since the electricity production decreases.

With these approaches, CO₂ emissions can be associated to the minimum and maximum heat price. However, it should be noted that the CO₂ emissions for the marginal heat production can differ considerably to these ones, if the heat production system has other technologies than presented here. For instance the emissions can be negative if the heat production is dominated by CHP based on wood fuel (which is quite common in Sweden).

4 EIGHT SCENARIOS FROM 2010 TO 2050

The principles describes in the previous chapter were used to develop eight different energy market scenarios for the time period 2010-2050. All scenarios start with the same value for the year 2010 and thereafter develop in eight different directions; the principle is illustrated in *Figure 3*. As can be seen in the figure, the eight scenarios are achieved by combining high and low fossil prices with four levels of CO₂ emissions charge. This set of two times four values of input data are needed for each calculation point from 2020 to 2050. For 2010, only one set of data is used since this is the starting point of the scenarios. In the following subsection, the input data used are presented and in Section 4.2 the resulting energy market scenarios are described. All input data and resulting energy market parameters are also presented in Appendix A.

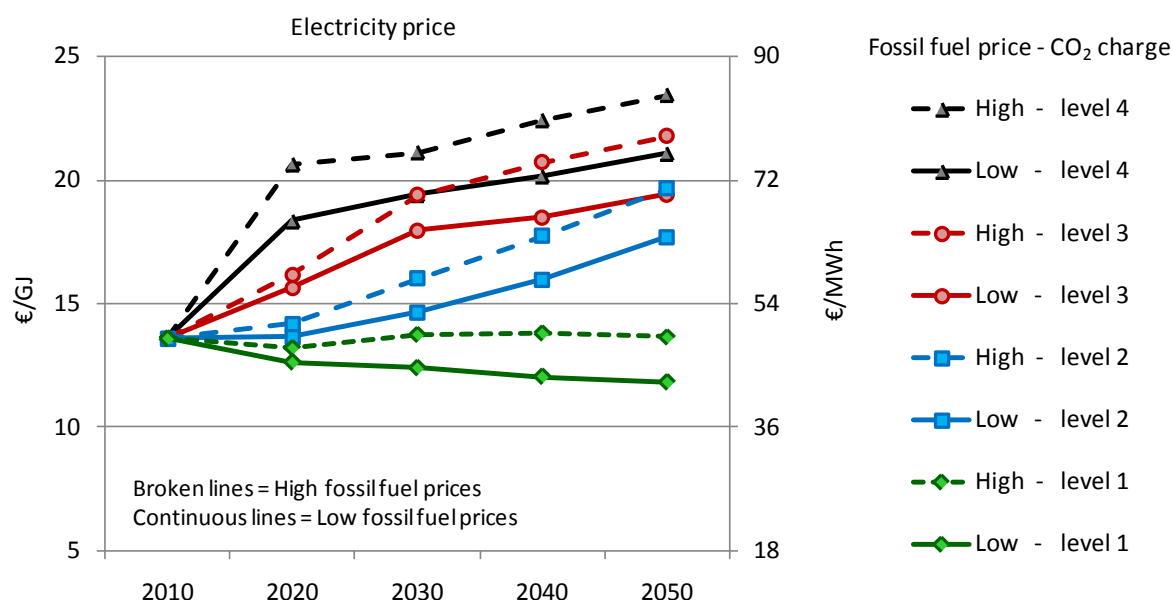


Figure 3: Example describing the principle for the eight scenarios. By combining two levels of fossil fuel prices and four levels of CO₂ charge, eight different combinations of input data are achieved, yielding eight scenarios for years 2020 to 2050. For the year 2010 only one set of input data is used, giving the starting point for all scenarios.

4.1 User inputs to the tool

All user inputs used for creating the eight energy market scenarios are listed in Appendix A. The inputs are chosen to reflect different climate change mitigation policies, as discussed further in [24] and different future fossil fuel market conditions as described in [25]. As already stated, two levels for fossil fuel prices have been used: low and high. The low fossil fuel prices are the baseline prices in Ref. [25] and the high prices are soaring prices in the same source. The price forecasts in Ref. [25] only stretch to 2030. For energy prices 2040 and 2050, the prices of [25] are extrapolated assuming decreasing price increase; see *Figure 4*. The energy prices in Ref. [25] are for 2005, hence exchange rates for 2005 were also used consistently (9.28 SEK/€, 13.5 SEK/£ and 7.28 SEK/\$).

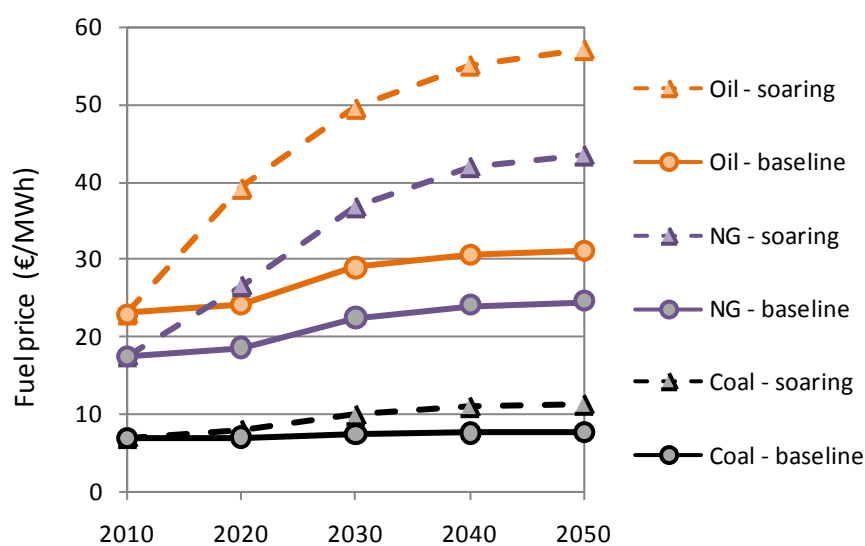


Figure 4: High and low world market fossil fuel prices that are used as input data for the eight scenarios.

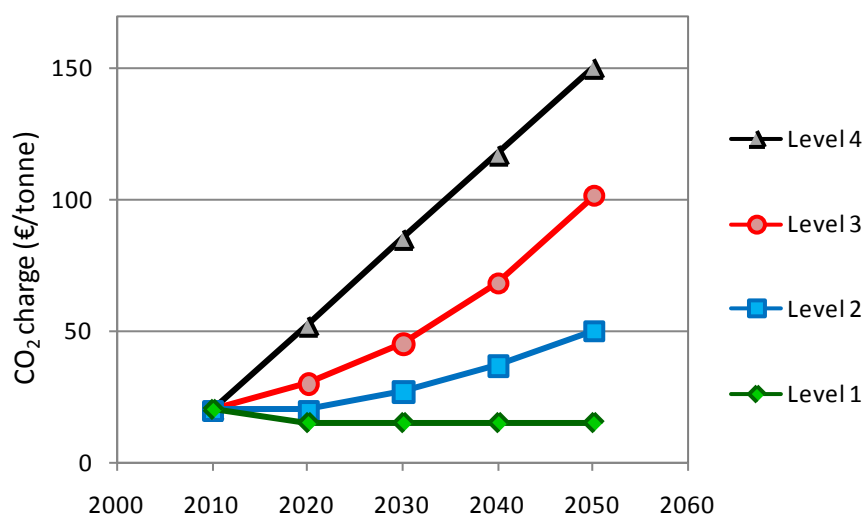


Figure 5: The four levels of CO₂ charge that is used as input data for the eight scenarios.

As stated in Section 3, the charge for emitting CO₂ is needed as an input data. For the scenarios, four different levels of CO₂ emissions charge are used, see *Figure 5*. The starting point for the CO₂ charge (year 2010) is 20 €/ton, which is close to the market values during recent years. From this point there are four different development paths for the charge, i.e. four different levels. For Level 1, the CO₂ charge is 15 €/tonne 2020-2050, which represents a case with low ambitions for CO₂ emission reduction. The Level 2 charge has a slow exponential increase. An exponential increase corresponds to the increase rate predicted by a perfect foresight energy system optimisation model that includes the time value of money that is run with the objective function of finding the most cost effective path for CO₂ emission decrease. Also the CO₂ charge for Level 3 has an exponential development, but somewhat stronger. The third level represents a high CO₂ charge, which might be needed to reach low CO₂ emissions [26]. This line is simply linear from 20 €/tonne to 150 €/tonne, since an

exponential development would result in very similar figures for 2020 and 2030.

The support for electricity production from wood fuel (see Section 2.2) varies throughout Europe, but can be set to 20 €/MWh to represent an average value for Europe [8].

As stated in Section 3.4, the availability of carbon capture and storage technology in the electricity market of the tool is set by the user. In this case with continuous scenarios, this parameter is used to decide when this technology is assumed to be available in full scale. CCS is assumed to be available to some extent by 2020 but will probably not be the dominating build margin by then [27]. Consequently, CCS is considered to be an available build margin technology (see Section 3.4) from 2030 and forwards.

The results for the starting point for the scenarios, 2010, are derived in the same way as the other energy market parameters, only that there is only one set of input data for this year. The input of world market fossil fuel prices and the CO₂ charge for 2010 are figures close to the prices of the time of writing; see Appendix A. These figures are used in the tool to obtain consistent prices for electricity, wood fuel and heat for 2010.

Even though the input data are close to the current ones at the time of writing, they are likely to rapidly change in the short term given the significant short time fluctuations in market energy prices. These fluctuations are however not relevant. In fact the energy prices for 2010 are barely relevant at all, since the purpose of the scenario package is to evaluate *future* investments (see the introduction). However, any user of the tool can choose other data for 2010 to reflect a more updated situation if desired.

4.2 Resulting energy market scenarios

The resulting energy market scenarios are presented in brief below with one energy market in each subsequent subsection. All the detailed results presented in Appendix A.

4.2.1 Fossil fuel market

All the resulting fossil fuel prices for a large customer are presented in Appendix A, and the results are exemplified in *Figure 6*. As can be seen, the fuel oil prices vary over a wide span. In the scenarios with low world market fossil fuel prices and low CO₂ emissions charge, the end user prices only increase slightly from 2010 to 2050. In the scenarios with opposite conditions, the end user prices increase to up to the triple. These general results are also applicable for the other fuel types; see Appendix A.

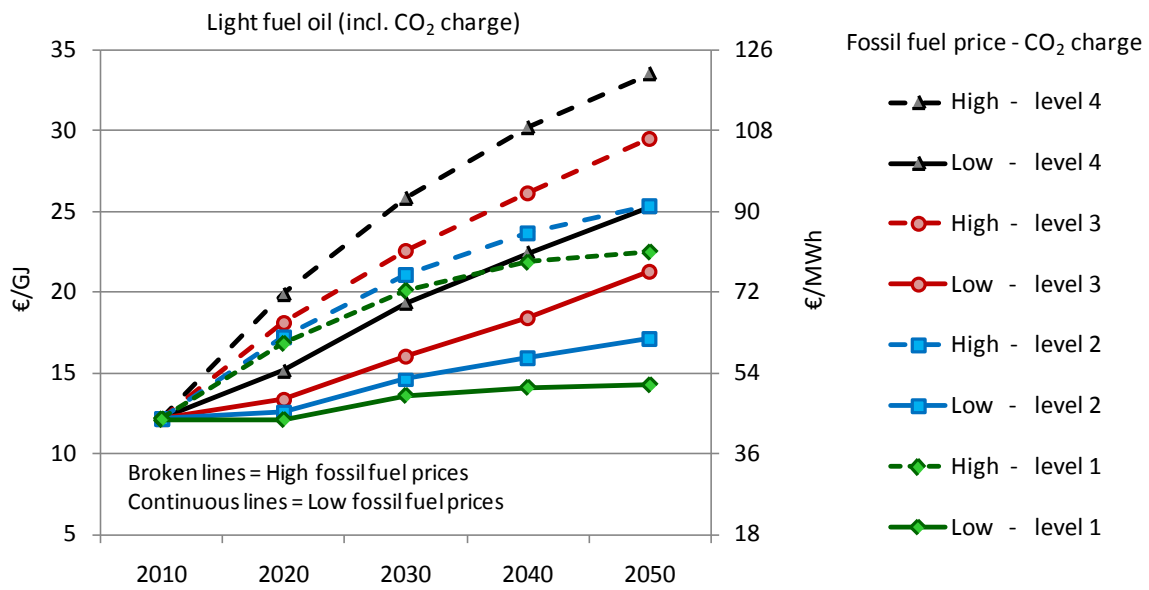


Figure 6: Resulting light fuel oil price for a large customer.

4.2.2 Electricity market

In *Figure 7* the results for the electricity market are presented. As can be seen, the electricity price increases with the CO₂ emissions charge and the fossil fuel price. With the introduction of carbon capture and storage technology, however, the increase of the electricity price due to increased CO₂ emissions charge can be moderated (see lines for CO₂ charge of level 3 and 4 from year 2030). For CCS to be profitable, the CO₂ charge must be at least 45-55 €/tonne. Before CCS is available in large scale (2010-2020), natural gas combined cycles (NGCC) can be a profitable option if the CO₂ emissions charge is high enough.

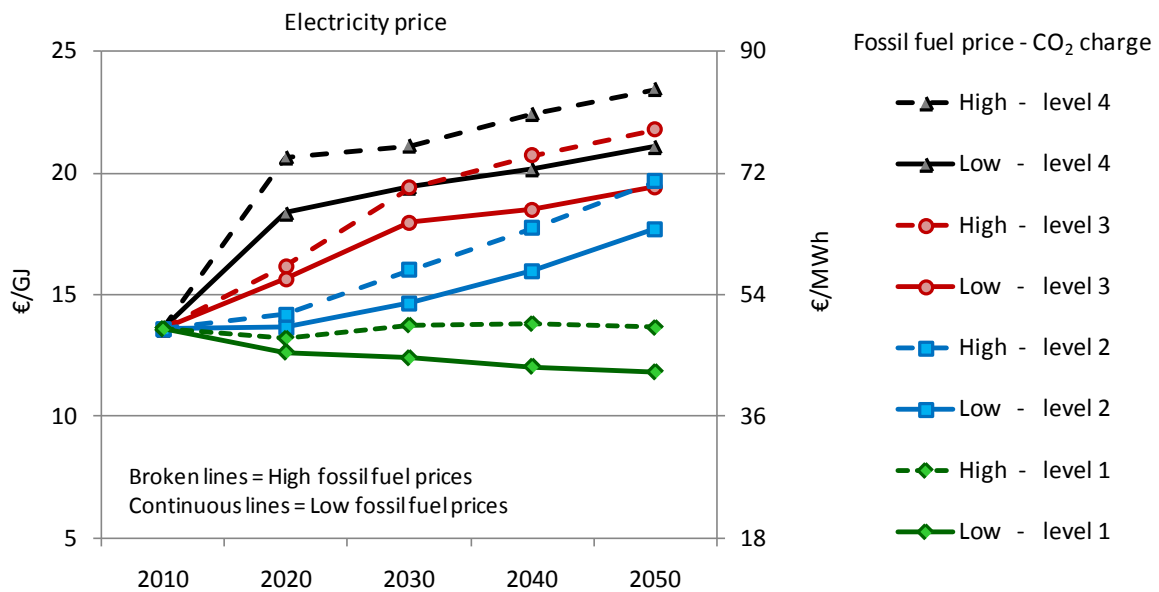


Figure 7: Resulting electricity prices.

4.2.3 Wood fuel market

As explained in Section 3.5, two different marginal users for wood fuel have been considered: coal power plants and producers of biofuel (with and without support for renewable electricity). All results are presented in Appendix A and in *Figure 8* the results are exemplified for co-combustion in coal power plants with support for renewable electricity. As can be seen in the figure, the wood fuel prices are heavily dependent on the CO₂ charge. However, the difference in high and low coal price is too small to make a big difference.

If the coal power plants do not benefit from policy instruments in support of renewable electricity generation, the wood fuel prices follow the same trend but are about 10 €/MWh lower; see Appendix A. These results are very similar to those achieved assuming that the marginal user of biomass feedstock is producers of biofuel, but two principle differences can be identified: 1) the fossil fuel price (oil price) is more decisive in this case, and 2) the CO₂ emissions related to marginal use of wood fuel is smaller.

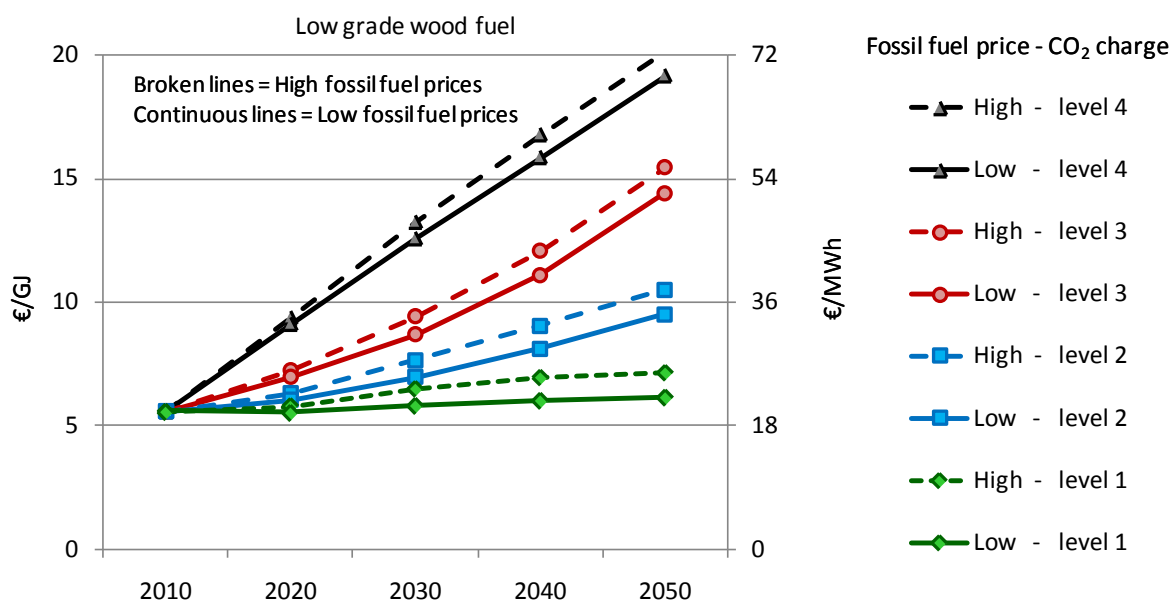


Figure 8: Market price of low grade wood fuel if coal power plants with support for renewable electricity are the marginal user.

4.2.4 Heat market

As discussed in Section 3.6, the heat price that a new player entering the heat market would face would be somewhere between a minimum and a maximum price. The results are exemplified for the scenario with low fossil fuel prices and level 2 CO₂ charge; the results for all scenarios are found in Appendix A.

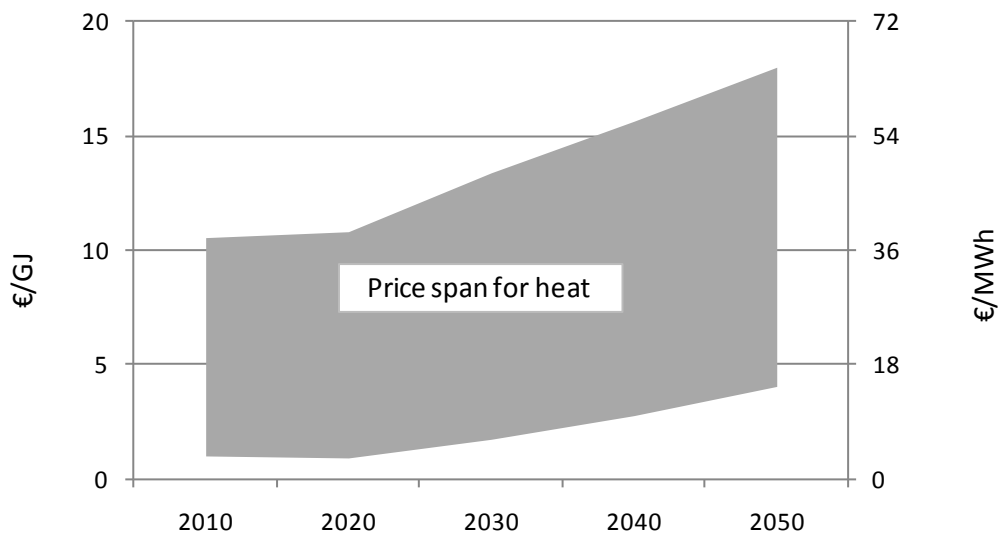


Figure 9: Price span for heat for a new player (e.g. supplier of industrial waste heat) entering a heat market in the scenario with low fossil fuel prices and level 2 CO₂ charge.

5 REFERENCES

- [1] IEA, *Energy Technology Perspectives 2008 - Scenarios and Strategies to 2050*, ISBN 978-92-64-04142-4, IEA Publications, Paris, 2008.
- [2] IEA. *Tracking Industrial Energy Efficiency and CO₂ Emissions*. IEA Publications, Paris, 2007.
- [3] Ådahl A., Harvey S., *Energy efficiency investments in Kraft pulp mills given uncertain climate policy*, Int. J. of Energy Research 31(5): pp 486-505, 2007.
- [4] Darton R., *Scenario Building and Uncertainties: Options for Energy Sources*. Chapter in: Azapagic A., Perdan S., Clift R., *Sustainable Development in Practice*, West Sussex: John Wiley & Sons Ltd. pp. 301-320. 2004.
- [5] Axelsson E., Harvey S., *A tool for creating energy market scenarios for evaluation of investments in energy intensive industry*, Energy, 2008. Published online: <http://dx.doi.org/10.1016/j.energy.2008.08.017>.
- [6] European Energy Agency, *Annual European Community greenhouse gas inventory 1990–2006 and inventory report 2008*, Technical report No 6/2008, 2008.
- [7] Commission of the European communities, *The support of electricity from renewable energy sources*, COM(2005) 627 final, 2005.
- [8] Fouquet D., *Prices for Renewable Energies in Europe: Feed in tariffs versus Quota Systems – a comparison*, EREF report, 2007.
- [9] Energimyndigheten, *Energy in Sweden Facts and figures 2007*, report from The Swedish Energy Agency, 2007. Available online at www.swedishenergyagency.se.
- [10] Uppenberg et al., *Environmental Handbook for Fuels (Miljöfaktaboken för Bränslen)*. IVL report B1334A-2, Stockholm, Sweden, 2001 (in Swedish).
- [11] Sköldberg H., Unger T., Olofsson M., *Marginal Electricity and Evaluating the Environmental Impact of Electricity (Marginalel och miljövärdering av el)*. Elforsk report 06:52, Stockholm, Sweden, 2006 (in Swedish). Available online at www.elforsk.se.
- [12] Odenberger M., Kjærstad J., Johnsson F., *Ramp up of CO₂ Capture and Storage within Europe*, International Journal of Greenhouse Gas Control, 4(2): pp 417-438, 2008.
- [13] IEA Bioenergy Task 40, *Opportunities and barriers for sustainable international bioenergy trade and strategies to overcome them*, a report prepared by IEA Bioenergy Task 40, 2006. Available online at www.bioenergytrade.org.
- [14] Johnsson, F., Berndes, G., Berggren, M., *Cost competitive bioenergy: linking lignocellulosic biomass supply with co-firing for electricity in Poland*. Presented at World Bioenergy Conference and Exhibition, Jönköping, Sweden, 30 May–1 June 2006.
- [15] Berndes G., Magnusson L. *The future of bioenergy in Sweden*. Report no. ER 2006:30, Swedish Energy Agency, 2006. Available online at www.swedishenergyagency.se.
- [16] Boding H., Ahlvik P., Brandber Å., Ekbohm T., *BioMeet II – Stakeholders for biomass based Methanol/DME/Power/Heat energy combine*. Eco-traffic and Nykomb Synergetics, 2003. Available online at www.nykomb.se.

- [17] Hedenus F., Karlsson S., Azar C., Sprei F., *The transportation energy carrier of the future. System interactions between the transportation and stationary sectors in a carbon constrained world*, presented at EVS24 Towards Zero Emissions, Stavanger, Norway, 2009.
- [18] Biomass Fuel Atlas of Profu, 2009.
- [19] Energimyndigheten, *Price Statistics for Biomass Fuels, Peat, etc* (Prisblad för biobränsle, torv mm), nr 4 2008. Available online at www.swedishenergyagency.se.
- [20] Personal communication, John Johnsson, Senior consultant at Profu i Göteborg AB, 2008.
- [21] Eurostat, *Energy statistics from the European Commission*, 2009. Available online at www.epp.eurostat.ec.europa.eu.
- [22] Fredriksson S., Werner S., *Fjärrvärme – teori, teknik och funktion*, Studentlitteratur, Lund, 1993.
- [23] Werner S., *Possibilities with more district heating in Europe*, report of Ecoheatcool work Package 4, Euroheat & Power, 2006. Available online at www.euroheat.org.
- [24] Ådahl A., Harvey S., Berntsson T. *Assessing the value of pulp mill biomass savings in a climate change conscious economy*, Energy Policy 34(15): pp 2330-2343, 2006.
- [25] Capros P., Mantzos L., Papandreou V., Tasios N., *Energy and transport: Trends to 2030 - update 2007*, European Commission: Directorate-General for Energy and Transport, 2008.
- [26] Mantzos L., Capros P., Zeka-Paschou M., *European energy and transport scenarios on key drivers*, Directorate-General for Energy and Transport, 2004
- [27] ENCAP, *Power systems evaluation and benchmarking*, ENCAP report D1.2.4 , 2008.

Appendix A – Input data and resulting energy market parameters

Here all the input data and resulting energy market parameters are presented in tables according to the list below:

Input data:	Table A1
Fossil fuel market:	Table A2
Electricity market:	Table A3
Bioenergy market:	Table A4:1-Table A4:3
Heat market:	Table A5:1-Table A5:2

Table A1. Input data for the energy market scenarios.

Fossil fuel prices¹ (€/MWh)		2010	2020	2030	2040	2050
Oilprice	low	23	24	29	31	31
	high	23	39	49	55	57
Natural gas price	low	18	19	22	24	25
	high	18	27	37	42	44
Coal price	low	7,0	7,1	7,5	7,6	7,7
	high	7,0	8	10	11	11
Policy instruments						
CO ₂ emission charge (€/ton)	level 1	20	15	15	15	15
	level 2	20	20	27	37	50
	level 3	20	30	45	68	101
	level 4	20	52	85	117	150
RES-E support ² (€/MWh)		20	20	20	20	20
Technology progress						
CCS available		no	no	yes	yes	yes

¹ On the world market

² Premium paid to producers of renewable electricity from combustible renewables (above market electricity price).

Table A2. Resulting end-user fossil fuel prices, including CO₂ charge (€/MWh).

	<i>Fossil fuel price*</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Light fuel oil	Low	Level 1	44	44	49	51	51
	Low	Level 2	44	45	53	57	62
	Low	Level 3	44	48	58	66	77
	Low	Level 4	44	54	70	81	91
	High	Level 1	44	61	72	79	81
	High	Level 2	44	62	76	85	91
	High	Level 3	44	65	81	94	106
	High	Level 4	44	72	93	109	121
Heavy fuel oil	Low	Level 1	28	27	31	33	33
	Low	Level 2	28	29	35	39	43
	Low	Level 3	28	32	40	48	58
	Low	Level 4	28	38	52	63	73
	High	Level 1	28	40	49	54	55
	High	Level 2	28	42	52	60	66
	High	Level 3	28	44	58	69	81
	High	Level 4	28	51	70	84	95
Natural gas	Low	Level 1	26	26	30	32	32
	Low	Level 2	26	27	33	36	40
	Low	Level 3	26	29	37	43	51
	Low	Level 4	26	34	45	54	61
	High	Level 1	26	34	44	50	51
	High	Level 2	26	35	47	54	59
	High	Level 3	26	37	51	61	70
	High	Level 4	26	42	60	72	80
Coal	Low	Level 1	14	13	14	14	14
	Low	Level 2	14	15	18	21	26
	Low	Level 3	14	18	24	32	44
	Low	Level 4	14	26	38	49	61
	High	Level 1	14	14	16	17	17
	High	Level 2	14	16	20	25	30
	High	Level 3	14	19	26	35	47
	High	Level 4	14	27	40	52	64

* On the world market, see input data.

Table A3. Resulting build margin, electricity price and associated CO₂ emissions.

	<i>Fossil fuel price</i>	<i>CO2 charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Build margin*	Low	Level 1	Coal	Coal	Coal	Coal	Coal
	Low	Level 2	Coal	Coal	Coal	Coal	Coal, CCS
	Low	Level 3	Coal	Coal	Coal, CCS	Coal, CCS	Coal, CCS
	Low	Level 4	Coal	NGCC	Coal, CCS	Coal, CCS	Coal, CCS
	High	Level 1	Coal	Coal	Coal	Coal	Coal
	High	Level 2	Coal	Coal	Coal	Coal	Coal
	High	Level 3	Coal	Coal	Coal	Coal, CCS	Coal, CCS
	High	Level 4	Coal	Coal	Coal, CCS	Coal, CCS	Coal, CCS
Electricity price (€/MWh)	Low	Level 1	49	46	45	43	43
	Low	Level 2	49	49	53	58	64
	Low	Level 3	49	56	65	66	70
	Low	Level 4	49	66	70	73	76
	High	Level 1	49	47	50	50	49
	High	Level 2	49	51	58	64	71
	High	Level 3	49	58	70	75	78
	High	Level 4	49	74	76	81	84
CO₂ emissions (kg/MWh)	Low	Level 1	770	722	679	642	619
	Low	Level 2	770	722	679	642	120
	Low	Level 3	770	722	129	123	120
	Low	Level 4	770	345	129	123	120
	High	Level 1	770	722	679	642	619
	High	Level 2	770	722	679	642	619
	High	Level 3	770	722	679	123	120
	High	Level 4	770	722	129	123	120

* Denotation for marginal technology:

Coal = coal condensing power plant

Coal, CCS = ditto with carbon capture and storage

NGCC = natural gas combined cycle

NGCC, CCS = ditto with carbon capture and storage (not present with current set of input data)

Table A4:1 – A4:3. Market price¹ for wood fuels and associated CO₂ emissions.

Table A4:1. If coal power plants benefitting from support of renewable electricity production are the marginal user of wood fuel.

	<i>Fossil fuel price</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Low grade* (€/MWh)	Low	Level 1	20	20	21	22	22
	Low	Level 2	20	22	25	29	34
	Low	Level 3	20	25	31	40	52
	Low	Level 4	20	33	45	57	69
	High	Level 1	20	21	23	25	26
	High	Level 2	20	23	28	33	38
	High	Level 3	20	26	34	43	56
	High	Level 4	20	34	48	60	73
Pellets (€/MWh)	Low	Level 1	31	31	32	33	34
	Low	Level 2	31	33	38	43	50
	Low	Level 3	31	38	46	57	72
	Low	Level 4	31	48	64	79	94
	High	Level 1	31	32	36	38	39
	High	Level 2	31	35	41	48	54
	High	Level 3	31	39	49	61	77
	High	Level 4	31	49	67	83	99
CO₂ emissions, all scenarios			336 kg/MWh				

* Low grade biofuel such as tops and branches, sawdust etc.

¹ i.e. buyers price. To get the sellers price, the transportation cost (of e.g. 4.3 €/MWh) have to be deducted.

Table A4:2. If coal power plants are the marginal user of wood fuel.

	<i>Fossil fuel price</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Low grade* (€/MWh)	Low	Level 1	11	10	11	11	11
	Low	Level 2	11	12	15	18	23
	Low	Level 3	11	16	21	29	41
	Low	Level 4	11	23	35	46	58
	High	Level 1	11	11	13	14	15
	High	Level 2	11	13	17	22	27
	High	Level 3	11	16	24	33	44
	High	Level 4	11	24	37	50	61
Pellets (€/MWh)	Low	Level 1	20	19	19	19	19
	Low	Level 2	20	21	25	29	35
	Low	Level 3	20	25	33	43	58
	Low	Level 4	20	35	51	65	80
	High	Level 1	20	20	22	24	24
	High	Level 2	20	22	28	34	40
	High	Level 3	20	27	36	47	63
	High	Level 4	20	36	54	69	85

CO₂ emissions, all scenarios 336 kg/MWh

* Low grade biofuel such as tops and branches, sawdust etc.

Table A4:3. If producers of biofuel are the marginal user of wood fuel.

	<i>Fossil fuel price</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Low grade* (€/MWh)	Low	Level 1	6,3	6	10	12	12
	Low	Level 2	6,3	7	12	15	17
	Low	Level 3	6,3	9	15	20	26
	Low	Level 4	6,3	12	22	29	35
	High	Level 1	6,3	18	26	30	32
	High	Level 2	6,3	19	28	33	37
	High	Level 3	6,3	20	30	38	46
	High	Level 4	6,3	23	37	47	55
Pellets (€/MWh)	Low	Level 1	14	14	19	20	21
	Low	Level 2	14	15	21	24	27
	Low	Level 3	14	16	24	31	39
	Low	Level 4	14	21	33	42	50
	High	Level 1	14	29	39	44	46
	High	Level 2	14	30	41	49	53
	High	Level 3	14	31	44	55	65
	High	Level 4	14	35	53	66	76
CO₂ emissions (kg/MWh)	Low	Level 1	112	115	118	120	121
	Low	Level 2	112	115	118	120	153
	Low	Level 3	112	115	152	152	153
	Low	Level 4	112	139	152	152	153
	High	Level 1	112	115	118	120	121
	High	Level 2	112	115	118	120	121
	High	Level 3	112	115	118	152	153
	High	Level 4	112	115	152	152	153

* Low grade biofuel such as "tops and branches", sawdust etc.

Table A5:1-A5:2. Market value for sales of heat to a district heating network and associated CO₂ emissions.

Table A5:1. Minimum market value (related to heat production price in a coal-fired CHP plant).

	<i>Fossil fuel price</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Heat price (€/MWh)	Low	Level 1	3,6	2,2	3,4	4	5
	Low	Level 2	3,6	3,3	6,2	10	15
	Low	Level 3	3,6	5,4	11	24	42
	Low	Level 4	3,6	14	32	51	69
	High	Level 1	3,6	2,8	5,1	6,8	7,7
	High	Level 2	3,6	3,9	7,9	12	17
	High	Level 3	3,6	6,0	12	25	44
	High	Level 4	3,6	11	33	52	71
CO₂ emissions (kg/MWh)	Low	Level 1	187	213	237	257	270
	Low	Level 2	187	213	237	257	544
	Low	Level 3	187	213	539	543	544
	Low	Level 4	187	421	539	543	544
	High	Level 1	187	213	237	257	270
	High	Level 2	187	213	237	257	270
	High	Level 3	187	213	237	543	544
	High	Level 4	187	213	539	543	544

Table A5:1. Maximum (related to heat production price in local gas boilers).

	<i>Fossil fuel price</i>	<i>CO₂ charge</i>	<i>2010</i>	<i>2020</i>	<i>2030</i>	<i>2040</i>	<i>2050</i>
Heat price Pellets (€/MWh)	Low	Level 1	34	34	39	41	41
	Low	Level 2	34	36	42	46	50
	Low	Level 3	34	38	47	54	63
	Low	Level 4	34	44	57	67	76
	High	Level 1	34	44	56	62	64
	High	Level 2	34	45	59	68	73
	High	Level 3	34	48	63	75	86
	High	Level 4	34	53	74	88	98
CO₂ emissions, all scenarios		255	kg/MWh				

Appendix B – Suggestions for short descriptions of the scenarios for use in reports, papers, etc where output values from the scenarios are used as input in calculations

The authors of this report assume that most scenario users will use output values generated by the scenario tool as input data in calculations for which the results will be presented in reports, scientific papers, etc. In such cases it is often necessary to include a brief summary of the assumptions and calculation methods included in the tool. Providing such a short description of the scenario tool and results might be difficult for someone who has not been involved in the development of them. Hence, three suggestions with different lengths on how the scenarios can be described are given below.

Two sentences

The performance of future or long-term energy investments at industrial sites can be evaluated using consistent energy market scenarios. By using a number of different scenarios that outline possible cornerstones of the future energy market, robust investments can be identified.

One paragraph

The performance of future or long-term energy investments at industrial sites can be evaluated using consistent energy market scenarios. By using a number of different scenarios that outline possible cornerstones of the future energy market, robust investments can be identified and the climate benefit can be evaluated. To obtain reliable results, it is important that the energy market parameters within a scenario are consistent. Consistent scenarios can be achieved by using a tool where the energy-market parameters (e.g. energy prices and energy conversion technologies) are related to each other

Half a page

To assess profitability and net CO₂ emissions reduction potential of strategic energy-related investments in the industrial sector, it is important to consider possible developments of future energy market conditions. Energy market scenarios including future energy prices can be used to reflect different possible future energy market conditions. By assessing the profitability of investments for different energy market conditions, it is easier to identify robust investment options.

To achieve reliable results from the economic assessment, the energy market parameters within a given scenario must be consistent, i.e. the energy prices must be related to each other (i.e. accounting for energy conversion technology characteristics and applying suitable substitution principles). A systematic approach for constructing such consistent scenarios requires the use of a suitable calculation tool. The tool presented in this report proposes energy market prices for large-volume customers, based on world market fossil fuel price data on the and assumed values for energy and climate mitigation policy instruments. Hence, required user inputs to the tool include fossil fuel prices and charge for emitting CO₂.

With these inputs, the probable marginal energy conversions technologies in key energy markets can be determined, which in turn yield consistent values for energy prices and CO₂ emissions associated with marginal use of key energy carriers, namely electricity, wood fuel and heat for district heating.

Using the tool, eight energy market scenarios for the time period from 2010 to 2050 have been developed. The eight scenarios are a result of combining two levels of fossil fuel prices and four level of CO₂ charge. Two levels of fossil fuel prices represent different developments on the fossil fuel world market. Four levels of CO₂ emission charge represent everything from no to strong ambitions to decrease CO₂ emissions.

About one page

Use the summary in the beginning of this report (possible including Figure 1).